


**SPECIFICATIONS**

- \* Concrete strength to be 4,000 PSI at 28 days
- \* Designed according to 4th edition 2007 AASHTO LRDF procedures
- \* Reinforcing rebars to be grade 60 US steel
- \* #4 rebar to be spaced at 12" centers each way
- \* Walls and Floor are 6" thick
- \* Knock Out Walls are 2" thick

***Knock out walls  
on three sides***

- Flat Top - Top to be completed by others in field.
- Top can be precast, MINIMUM 8" REQUIRED - price depends on F&G Call for price

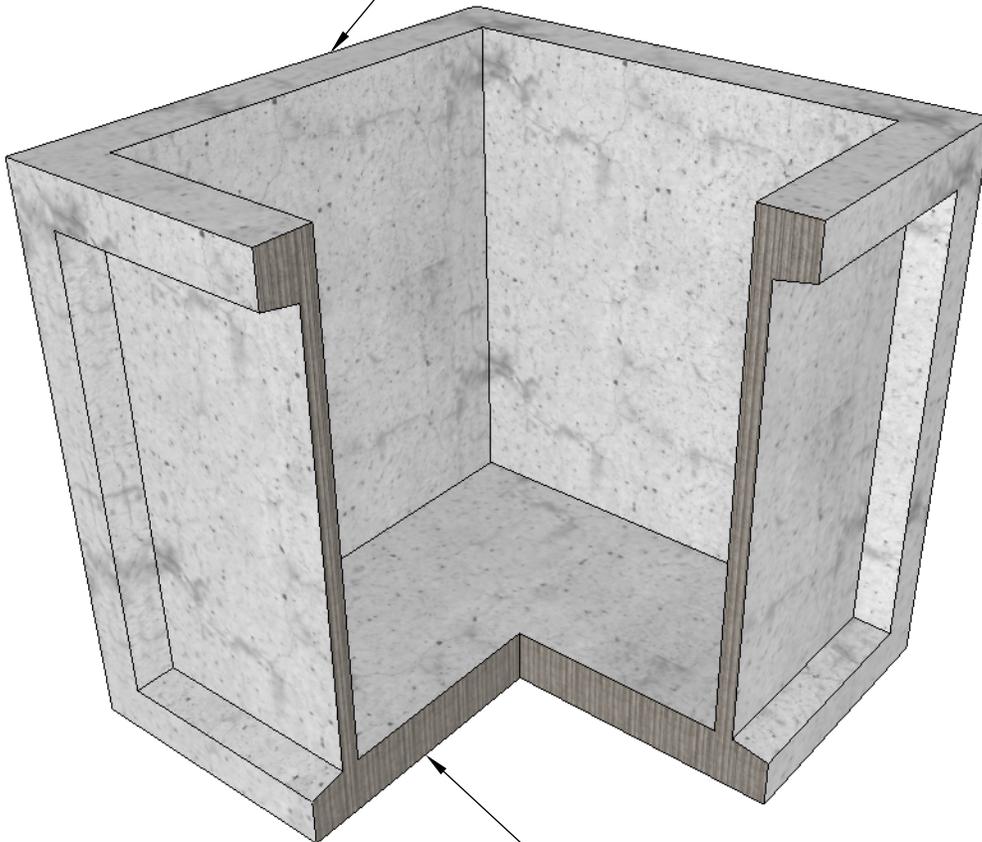

**Maximum Recommended Pipe Sizes**

- A-2000/PVC - 36"
- ADS/HDPE - 36"
- CMP - 42"
- CMPA - 36"
- RCP - 36"
- RCPA - 30"

**BASIN**

4'x4'x54" I.D.  
Weight: 4,407 lbs



Issued Date: Nov 2015  
LADOTD Certified Plant

**4'x4'x54" Catch Basin  
3 Knockout Walls**